

Space Requirements Dimensions (unit: mm)



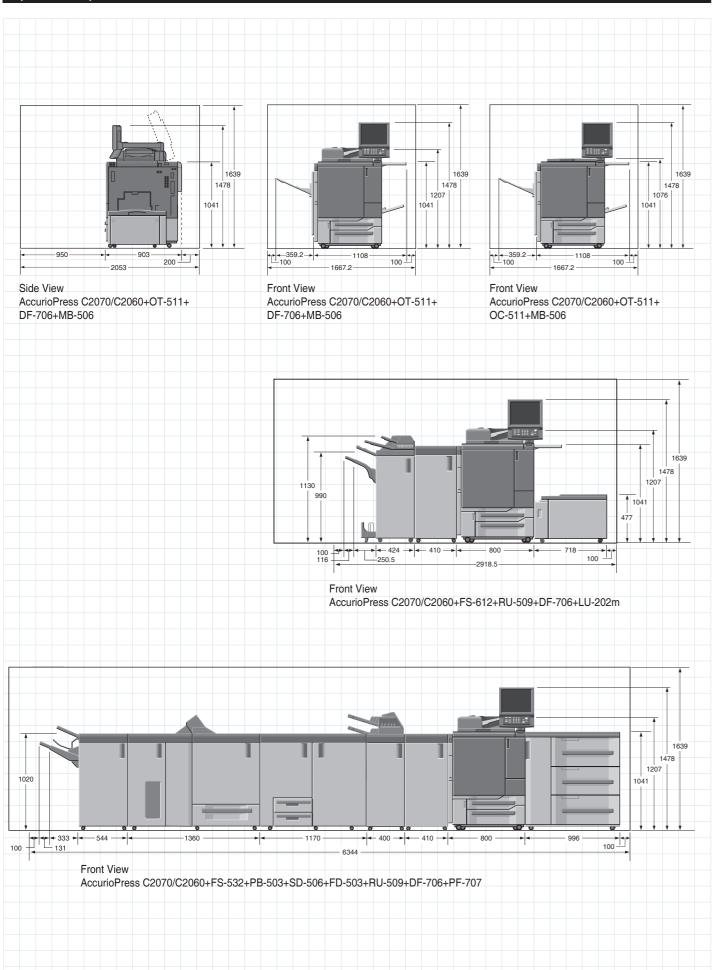

AccurioPress C2070 Spec Sheet

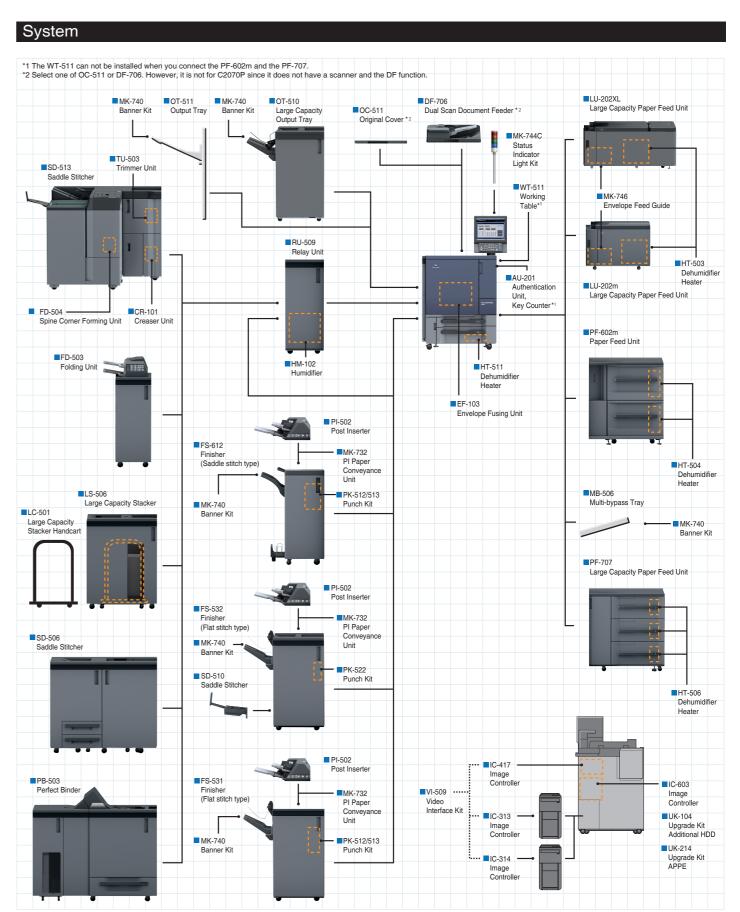

Specifications

AccurioPress C2070/C2060 General Specifications

			AccurioPress C2070	AccurioPress C2060
Type		Console type		
Copy Method			4-coupled drum tandem laser electr	ostatic method
Resolution	Scan		600 dpi x 600 dpi	
	Print		Equivalent to 3,600 dpi (Image data	resolution is 1,200 dpi) x 1,200 dpi
Gradation			8-bit / 256 Gradation	
CPU			Core i5 2400 3.1 GHz	Pentium G850 2.9 GHz
System Memory Cap	acity		10 GB	
Extended Memory			System memory capacity can be exter	nded up to 18GB with IC-603 or UK-104.
HDD			3 TB	•
Original Type			Sheet, Book, Solid object	
Max. Original Size			A3 or 11x17	
Max. Printing Area			323 mm × 480 mm	
Paper Size		Standard tray	SRA3, A3, B4, A4, B5, 13x19, 11x1	7, 8 1/2x14, 8 1/2x11, 5 1/2X8 1/2S
(S: Short Edge Feed)		Tab paper (A4, 8 1/2 x 11)	
			Max. 330mm x 487mm, Min. 140mn	n x 182mm
		Bypass tray	Max. 330mm x 487mm, Min. 100mn	n x 148mm
		(Option)		
Image Loss		Max. 4 mm or less for top edge, Ma	x. 4.5 mm or less for bottom edge,	
•			Max. 3.0 mm or less for right/left ed	ges
Warm-Up Time			390 seconds or less	-
First Copy Out Time		Colour	7.1 sec. or less	7.6 sec. or less
		Black and White		6.3 sec. or less
Print Speed		A4	71 ppm	61 ppm
(Colour, B&W)		A3	38 ppm	33 ppm
Copy Magnification		Fixed	Inch : x 1.000, x 2.000, x 1.545, x 1.	294, x 1.214, x 0.785, x 0.772,
			x0.647, x 0.500	
			Metric: x 1.000, x 2.000, x 1.414, x	1.189, x 0.840, x 0.707, x 0.500
		Zoom	x 0.250 to x 4.000 (Each 0.001 step)
Tray Capacity		Standard	Tray 1 (500 sheets)	
(80 gsm)			Tray 2 (1,000 sheets)	
		Option	MB-506 (Multi-bypass, 250 sheets)	1*2
			PF-602m (3,000 sheets x 2)*1	
			PF-707 (1,390 sheets x 2, 1,850 sh	
			LU-202m / LU-202XL (2,500 sheets)*1
Paper Weight		Standard	62 gsm to 256 gsm *3	
		Option	MB-506 / PF-602m / LU-202m / LU-	202XL: 62gsm to 300gsm
			PF-707: 62gsm to 350gsm	
Continuous Copy Count		Up to 9,999 sheets		
Power Source		Inch: AC208 to 240V 22A 60 Hz		
		Metric: AC220 to 240V 21A, 50 Hz		
Power Consumption		Inch: 4,900W or less (Main body on		
D: 100 (D) (10		Metric: 4,700W or less (Main body of		
Dimensions [W] x [D] x [H]		800 mm*4 x 903 mm*5 x 1,076 mm*		
		31-1/2"*4 x 35-1/2"*5 x 42-1/4"*6 (Ma		
Weight			Approximately 316 kg / 697 lb (Mair	i boay only)

yveight:

11 MB-506, PF-602m, PF-707, LU-202m and LU-202XL are the options.

12 PF-602m and PF-707 are not available when MB-506 is installed.

13 For paper size Ad or smaller than 8 1/2411, it is up to 216 gsm. 14 Excluding the control panel, output tray, work table.

15 Including the rear duct. 16 Height to the top of the original cover excluding the control panel.

AccurioPress C2070/C2060 Printer Controller

■Image Controller IC-313

Type	Server
CPU	Core i5 4570 2.9GHz
Memory	4 GB
HDD	1 TB
Page-description Language	Adobe PostScript 3 (3020), PDF 1.7,PPML v3.0GA,APPE 3.0,PCL 5/6 emuration
Printing Method	TCP/IP, SNMP, SMB, FTP, LPR, IPP, Bonjour
Applicable OS	Windows Vista*1 / 7*1 / 8.1*1 / 10*1
	Windows Server 2008*1 / 2012*1
	Mac OS X v10.8 / v10.9 / v10.10
Interface	10Base-T / 100Base-TX / 1000Base-T
Scanner Resolution	200 / 300 / 400 / 600 dpi
Data Format	PDF, TIFF, JPEG
Driver	Twain Plug-in

*1 Including 64-bit versions.

■Image Controller IC-314

Type	Server
CPU	Intel Core i7-4790S 3.2GHz
Memory	12 GB (7 GB:system memory, 5 GB:image memory)
HDD	3 x 1 TB (1 TB system disk, 2 x 1 TB image disks)
Page-description Language	Adobe Postscript CPSI 3020, APPE 3.4
Printing Method	TCP/IP, SMB, LPR, Bonjour
Applicable OS	Windows 7*1 / 8.1*1 / 10*1
	Windows Server 2008*1 / 2012*1
	Mac OS X v10.8 / v10.9 / v10.10 / v10.11
Interface	1Gbit Ethernet LAN port x 2
Scanner Resolution	200 / 300 / 400 / 600 dpi
Data Format	PDF, TIFF, JPEG

*1 Including 64-bit versions.

■Image Controller IC-603

	AccurioPress C2070	AccurioPress C2060
Type	AIO to the engine (option)	
CPU	Conforms with main unit specification	
Memory	10 GB (Standard of the main body)	10 GB(Standard of the main body)
	+ 4 GB (IC-603A)	+ 4 GB (IC-603A)
	+ 4 GB (UK-104)	+ 4 GB (UK-104)
	Max. 18 GB	Max. 18 GB
HDD		1 TB x 3 (Standard of the main body)
	+ 500 GB (UK-104)	+ 500 GB (UK-104)
	Max. 3.5 TB	Max. 3.5 TB
Page-description Language	Adobe PostScript3 (PS3020), PDF d	
	APPE (version 3.4) (UK-104 or UK-2	
	PDF/VT (version 2.0) (UK-104 or UK	
	TIFF direct print (TIFF version 6 com	pliance), PPML (version 2.2),
	PCL-5c compatible, PCL XL (PCL6 v	
Printing Method	Pserver (IPX/SPX), LPD / LPR (TCP	
	AppleTalk (EtherTalk),Bonjour (TCP/	IP), Web service printing (TCP/IP),
	NPrinter / RPrinter(IPX/SPX), Raw P	
Applicable OS	PS Plug-in: Windows Vista*1 / 7*1 / 8.	
		2008R2 / 2012*1 / 2012R2
	Mac OS X v10.8 / v10.9	
	PS PPD*2: Windows Vista*1 / 7 / 8.1*	
	Windows Server 2008*1 /	2008R2*1 / 2012*1 / 2012R2*1
	Linux CUPS	
Interface	Conforms with main unit specification	1
Scanner Resolution	200 / 300 / 400 / 600 dpi	
Data Format	PDF, TIFF, JPEG, XPS	
Driver	HDD Twain Driver, Real Time Mode	Twain Driver
*1 Includes 64-bit. *2 WHQL is not obtained for the	ne PS PPD driver	

■Image Controller IC-417

Type	Embedded
CPU	Celeron G1820 2.7GHz
Memory	2 GB
HDD	500GB SATA
Page-description Language	Adobe PostScript3 (PS3020),(PDF 1.7),PCL 5/6 emulation
	TCP/IP, SNMP, SMB, FTP, LPR, IPP,Bonjour
Applicable OS	Windows Vista*1 / 7*1 /8.1*1 /10*1
	Windows Server 2008*1 /2012*1
	Mac OS X v10.8 / v10.9 / v10.10
Scanner Resolution	200 / 300 / 400 / 600 dpi
Data Format	PDF, TIFF, JPEG
Driver	Twain Plug-in
td In alcoling Od his consists	

Options

Dual Scan	Document Feeder	DF-706

Paper Type	Normal original mode	Simplex original mode: 35 gsm to 210 gsm Duplex original mode: 50 gsm to 128 gsm
	Mixed original mode	Simplex original mode, Duplex original mode: 50 gsm to 128 gsm
Paper Size		A3, B4, A4, B5, A5, B6S, 11x17, 8 1/2x11
Capacity		300 sheets (80 gsm)
Scan Speed (A4)	At copying (600dpi)	Full colour: Simplex 75 ppm / Duplex 150 ppm (A4 horizontal)
		Black and White: Simplex 80 ppm / Duplex 160 ppm (A4 horizontal)
	At scanning (300dpi)	Full colour/Black and White: Simplex 120 ppm / Duplex 240 ppm (A4 horizontal)
Power Source		Supplied from the machine
Dimensions [W] x [D] x [H]		618 mm x 575 mm x 180 mm / 24.31" x 22.63" x 7.06"
Weight		Approximately 15.1 kg / 33.31 lb

■ Multi-bypass Tray MB-506	
Paper Weight	62 gsm to 300 gsm
Paper Size	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm
	250 sheets (80 gsm)
Power Source	Supplied from the main body
	Max. 28W or less
Dimensions [W] x [D] x [H]	485 mm x 503 mm x 327 mm / 19.09" x 19.8" x 12.87" (Max. dimensions of the whole un
Weight	Approximately 4.2 kg / 9.26 lb

■ Envelope Fuser Unit EF-103

Envelope ruser offic Er-103		
Envelope weigh		70 gsm to 100 gsm
Envelope Size	Paper length in the main scan direction	100 mm to 245 mm*
	Paper length in the sub scan direction	148 mm to 375 mm
Power Source		Supplied from the main body.
Power Consumption		2430W or less
Dimensions [W] x [D] x [H]		200 mm x 690 mm x 235 mm / 7.87" x 27.17" x 9.25"
Weight		Approximately 18.8 kg / 41.45 lb

* When the paper length is less than 139.7 mm, paper feed assist parts must be connected.

Boner Fooder Unit DE 707

■ Paper Feeder U	Paper Feeder Unit PF-707	
Paper Size		SRA3, A3, B4, A4, B5, A5, 13x19, 12x18, 11x17, 9x11, 8 1/2x14, 8 1/2x11
		Tab paper (A4, 8 1/2x11)
		Max. 330.2 mm x 487.7 mm, Min. 100 mm x 140 mm*1
Paper Type		Plain, Fine, Colour, Coated, Envelope*2
Paper Weight		62 gsm to 350 gsm
Max. Tray Capacity	Upper & Middle Tray	1,390 sheets each
(80 gsm)	Bottom Tray	1,850 sheets
	Total	4,630 sheets
Power Source		Inch: 120VAC, Metric: 230VAC
Dimensions [W] x [D] x [H]		996 mm x 772 mm x 1,038 mm / 39.21" x 30.39" x 40.87"
Weight		203 kg / 447.4 lb

^{*1} For the paper whose width is less than 140 mm, use the small size guide. *2 Only upper tray supports envelopes.

Paper Feeder Unit PF-602m

■ Paper Feeder	Unit PF-602m	
Paper Size		SRA3, A3, B4, A4, B5, A5, 13×19, 12×18, 11×17, 9×11, 8 1/2×14, 8 1/2×11
		Tab paper (A4, 8 1/2x11)
		Tray (upper): Max. 330 mm x 487 mm, Min. 100 mm x 182 mm
		Tray (lower): Max. 330 mm x 487 mm, Min. 100 mm x 148 mm
Paper Type		Plain, Fine, Coated paper
Paper Weight	Upper Tray	62 gsm to 256 gsm
	Lower Tray	62 gsm to 300 gsm
Max. Tray Capacity (8	30 gsm)	6,000 sheets (3,000 sheets x2)
Power Source		Supplied both from the main body.
Max. Power Consumption		DC: 90W or less, AC: 100W or less
Dimensions [W] x [D] x [H]		947 mm x 750 mm x 1,045 mm / 37.28" x 29.53" x 41.14"
Weight		Approximately 170 kg / 374.78 lb

■ Large Capacity Unit LU-202m/LU-202XL

Paper Size		SRA3, A3, B4, A4, B5, 13x19, 12x18, 11x17, 9x11, 8 1/2x14, 8 1/2x11
		Tab paper (A4, 8 1/2x11)
		LU-202m: Max. 330 mm x 487 mm, Min. 210 mm x 182 mm*:
		LU-202LX: Max. 330 mm x 750 mm, Min. 210 mm x 182 mm*1
Paper Type		Plain, Fine, Coated paper
Paper Weight		62 gsm to 300 gsm
Paper Capacity (80 gsm)		2,500 sheets*2
Power Source		Supplied both from the main body.
Max. Power Consumption		DC: 70W or less AC: 50W or less (Not including HT-503)
Dimensions [W] x [D] x [H]	LU-202m	710 mm x 639 mm x 477 mm / 27.95" x 25.16" x 18.78"
	LU-202XL	1,012 mm x 639 mm x 477 mm / 39.84" x 25.16" x 18.78"
Weight	LU-202m	Approximately 42 kg / 92.59 lb
	LU-202XL	Approximately 60 kg / 132.28 lb

^{*1} Available types of paper weighing 300 gsm are limited to specific types. *2 Stacked height 275 mm

■Relay Unit RU-509

Paper Size	Max. 330 mm x 487 mm, Min. 100 mm x 140 mm
	62 gsm to 300 gsm
Power Source	Supplied from the machine.
Dimensions [W] x [D] x [H]	410 mm × 735 mm × 1,020 mm / 16-1/4" × 29" × 40-1/4"
Weight	Approximately 60 kg / 132.28 lb

weight	Approximately 60 kg / 132.26 ib
■ Humidifier HM-102	
Paper Type	Same as the main body.

■ Large Capacity Output Tray OT-510

Paper Weight		62 gsm to 350 gsm	
Paper Size		Max. 330 mm x 487 mm, Min. 100 mm x 148 mm	
		Max. 330.2 mm x 1,200 mm, Min. 100 mm x 148 mm*1	
Paper Capacity	488 mm or less	Max. 4,200 sheets (80 gsm, 0.03109 m² to 0.06237 m²)	
(sort / group mode)	489 mm to 762 mm*1	Max. 300 sheets*2 (128 gsm to 135 gsm)	
	763 mm or more*1	Max. 100 sheets (128 gsm to 135 gsm)	
	Envelope	100 sheets or more	
Paper Capacity (offset sort / offset group mode)		Max. 1,500 sheets (72 gsm to 81 gsm, 0.03109 m² or more)	
Power Source		24VDC (supplied from the main body)	
Max. Power Consumption		144W or less	
Dimensions [W] x [D] x [H]		544 mm x 723 mm x 1,070 mm / 21" x 28-1/2" x 42"	
Weight		Approximately 55 kg / 121 lb	

1 Paper of 489 mm length is available only when the MK-740 plate is installed. *2 MK-740

Finisher FS-531

Paper Weight	Non-sort, Sort/Group, Sub Tray mode	62 gsm to 350 gsm	
	Staple mode	62 gsm to 209 gsm	
	Non-sort, Sort/Group mode	Max. 320 mm x 458 mm, Min. 182 mm x 148 mm, 128 mm x 148 mm*1	
(S:ShortEdgeFeed □)	Staple mode	Max. 314 mm x 458 mm, Min. 182 mm x 148 mm	
	Sub Tray mode	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm	
	Non-sort, Sort/Group mode	Max. 3,000 sheets (A4, B5, 8 1/2x11, 16K, 7 1/4x10 1/2)	
(Main Tray, 80 gsm)	Staple mode	•2 to 9 sheets: 100 sets (FD Direction: 417 mm or less) / 50sets (Other)	
		•10 to 20 sheets: 50 sets •21 to 30 sheets: 30 sets	
		•31 to 40 sheets: 25 sets •41 to 50 sheets: 20 sets	
Paper Capacity (Sub Tray, 80 gsm)		Max. 100 sheets	
Stapling Mode Types		Parallel or diagonal dipending on paper size	
(Staple Position)	2 staplings	Center spreading 162 mm pitch	
Power Source		24/5VDC (supplied from the main body)	
Max. Power Consumption		80W or less	
Dimensions [W] x [D] x [H]		424 mm*2 x 656 mm x 990 mm / 16.69"*2 x 25.83" x 39"	
		Width including the primary (main) tray (with the edge closed): 674.5 mm / 26.56"	
		Width including the primary (main) tray (with the edge pulled out): 790.5 mm / 31.12"	
Weight		60 kg / 132-1/4 lb	

*1 Non-sort mode only *2 Excluding the primary (main) tray

■Post Inserter PI-502 *Optional Mount Kit MK-732 with FS-532 is required.

per Size Upper Tray		A4, B5, A5, 9x11, 8 1/2x11
	Lower Tray	SRA3, A3, B4, A4, B5, A5, 12x18, 11x17, 8 1/2x14, 8 1/2x11
per Capacity (80 gsm)		Max. 200 sheets
wer Source		Supplied from Finisher FS-532
mensions [W] x [D] x [H]		540 mm × 620 mm × 220 mm / 21-1/4" × 24-1/2" × 8-3/4"
eight		Approximately 11.7 kg / 25.79 lb

Specifications

■ Large Capacity Stacker LS-506

Large Supusity Statistics 25 555			
Paper Size	Stacker tray mode	Max. 331 mm x 483 mm, Min. 210 mm x 148 mm	
	Sub tray mode	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm	
Paper Weight	Stacker tray mode	62 gsm to 350 gsm	
	Sub tray mode	62 gsm to 350 gsm	
Paper Capacity(80 gsm)	Stacker tray mode	Max. 5,000 sheets	
	Sub tray mode	200 sheets (Z-Fold: 20 sheets, Centre-Fold: 40 sheets)	
Power Source		100VAC to 240VAC, 5VDC (Only 5VDC is supplied from the main body	
Max. Power Consumption		150W or less	
Dimensions [W] x [D] x [H]		785 mm x 723 mm x 1,020 mm / 31" x 28-1/2" x 40-1/8"	
Weight		Approximately 110 kg / 242-1/2 lb	

	■ Finisher FS-612			
Paper Weight Non-sort, Sort/Group, Sub Tray mode		Non-sort, Sort/Group, Sub Tray mode		
		Staple, Saddle Stitching,	62 gsm to 105 gsm	
		Half-Fold, Tri-Folding mode		
	Paper Size	Non-sort, Sort/Group mode	Max. 320 mm x 458 mm, Min. 182 mm x 148 mm, 128 mm x 148 mm*1	
	(S:ShortEdgeFeed □)	Staple mode	Max. 314 mm x 458 mm, Min. 182 mm x 148 mm	
		Saddle stitching, Half-Fold mode	Max. 320 mm x 458 mm, Min. 210 mm x 279 mm	
		Tri-Folding mode	A4S, 8 1/2x11S	
		Sub Tray mode	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm	
		Non-sort, Sort/Group mode	Max. 2,500 sheets (A4, B5, 8 1/2x11, 16K, 7 1/4x10 1/2, 9x11)	
	(Main Tray, 80 gsm)	Staple mode	•2 to 9 sheets: 100 sets (FD Direction: 417 mm or less) / 50sets (Other)	
			•10 to 20 sheets: 50 sets •21 to 30 sheets: 30 sets	
			•31 to 40 sheets: 25 sets •41 to 50 sheets: 20 sets	
		Saddle Stitching mode	5 sheets: 15 sets (Direction: 299 mm or less) / 20 sets (Other)	
	(Booklet Tray, 80 gsm)		3 sheets: 25 sets (Direction: 299 mm or less) / 33 sets (Other)	
		Tri-Folding mode	50 sets	
Paper Capacity (Sub Tray, 80 gsm)		b Tray, 80 gsm)	Max. 100 sheets	
Power Source			24/5VDC (supplied from the main body)	
Max. Power Consumption			80W or less	
Dimensions [W] x [D] x [H])] x [H]	424 mm*2 x 656 mm x 990 mm / 16.69"*2 x 25.83" x 39"	
			Width including the primary (main) tray (with the edge closed): 674.5 mm / 26.5	
			Width including the primary (main) tray (with the edge pulled out): 790.5 mm / 31.13	
Weight			65 kg / 143-1/4 lb	

*1 Non-sort mode only *2 Excluding the primary (main) tray

■Punch Kit P	K-512/513	
Hole Pitch	PK-512	80 mm (2 holes / 4 holes), 108 mm (3 holes)
	PK-513	21 mm, 70 mm, 21 mm (Swedish 4 holes)
Paper Weight		62 gsm to 128 gsm
Paper Size	PK-512	2 holes: A3, B4, A4, B5, 11x17, 8 1/2x14, 8 1/2x11
		3/4 holes: A3, B4, A4, B5, 11x17, 8 1/2x11
	PK-513	A3, B4, A4, B5
Power Source		Supplied from the main body.
Max. Power Consumption		40W or less
Dimensions [W] x [D] x [H]		130 mm x 470 mm x 115 mm / 5.12" x 18.5" x 4.53"
Weight		Approximately 3 kg / 6.61 lb

Finisher FS-532

Paper Weight		Staple mode: 62 gsm to 300 gsm
		Straight / Shift mode: 62 gsm to 350 gsm
Paper Size	Staple mode	Max. 330 mm x 488 mm, Min. 203 mm x 148 mm
	Straight/Shift mode	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm (Using small size guides)
Paper Capacity (80 gsm)		Max. 4,500 sheets (Main + Sub tray)
Stapling Mode Types		Corner stapling: Horizontal, Vertical
. •		2-point stapling: Centre
Power Source		Supplied from the machine
Max. Power Consumption		144W or less
Dimensions [W] x [D] x [H]		544 mm x 723 mm x 1,070 mm / 21-1/2" x 28-1/2" x 42-1/4"
Weight		74 kg / 163-1/4 lb

■ Punch Kit PK-522

FUIICII KIL FK-322	
Applicable	Finisher FS-532
Hole Pitch	Metric area: 80 mm (2 holes / 4 holes), 21 mm, 70 mm, 21 mm
	(Swedish 4 holes)
	Inch area: 70 mm (2 holes), 108 mm (3 holes)
Paper Weight	62 gsm to 300 gsm
Paper Size	2 holes: A3, B4, A4, B5, 11x17, 9x11, 8 1/2x14, 8 1/2x11
	3/4 holes: A3, B4, A4, B5, 11x17, 9x11, 8 1/2x11
Power Source	Supplied from the main unit
Dimensions [W] x [D] x [H]	156 mm x 592 mm x 180 mm / 6-1/4" x 23-1/4" x 7-1/4"
Weight	4.5 kg / 9.92 lb

■ Saddle Stitcher SD-510

Paper Size	Paper Size		SRA3, A3, B4, A4, 13x19, 12x18, 11x17, 8 1/2x14, 8 1/2x11S
(S: Short Edge Fe	(S: Short Edge Feed)		Max. 330 mm x 487 mm, Min. 120 mm x 240 mm
,		Fold & Staple	
		Three Fold-in	A4S, 8 1/2x11
Fold Mode	Saddle S	Stitch	2 to 5 sheets: 35 sets, 6 to 10 sheets: 23 sets, 11 to 25 sheets: 15 sets
Tray Capacity	(330 mm	or more in length)	
	Centre-F	old	1 to 5 sheets: 35 sets
	Three Fo	old	1-sheet fold: 50 sets, 2-sheet fold: 40 sets, 3-sheet fold: 30 sets
	(less than 330 mm in le		
Sheets Saddle S	Sheets Saddle Stitch		Max. 20 sheets
Sheets Folded	Sheets Folded Centre-Fold Three Fold-in		Max. 5 sheets
			Max. 3 sheets
Power Source			Supplied from the main unit
Dimensions [W] x [D] x [H]			281 mm x 596 mm x 530 mm / 11.07" x 23.48" x 20.86"
Weight			Approximately 26.4 kg / 58-1/4 lb
*Usable paper types will vary according to function		ry according to function	n and paper exit destination.

■ Folding Unit FD-503

Hole Pitch		Metric area: 80 mm (2 holes / 4 holes)
Hole Pitch		
		Inch area: 70 mm (2 holes), 108 mm (3 holes)
Fold Types		Centre-fold, Three fold-in, Three fold-out,
		Double parallel, Z-fold, Gatefold
Paper Size	Hole Punch	2 holes: SRA3, A3, B4, A4, B5, 12x18, 11x17, 8 1/2x14, 8 1/2x11
		3/4 holes: SRA3, A3, B4, A4, B5, 12x18, 11x17, 8 1/2x11
	Folding mode	Max. 305 mm x 458 mm, Min. 210 mm x 279 mm
	Post insertion mode	Max. 331 mm x 483 mm, Min. 182 mm x 139 mm
	Straight mode	Max. 330 mm x 483 mm, Min. 182 mm x 148 mm
Paper Weight	Punch	62 gsm to 216 gsm
, ,	Folding mode	Centre-Fold / Three Fold-in / Three Fold-out / Z-Fold: 62 gsm to 130 gsm
		Double Parallel / Gatefold: 62 gsm to 91 gsm
	Post insertion mode	62 gsm to 300 gsm
	Straight mode	62 gsm to 350 gsm
	Sub Tray mode	62 gsm to 350 gsm
Power Source		100VAC to 240VAC, 5VDC (supplied from the main body)
Dimensions [W] x [D] x [H]		400 mm*1 x 723 mm x 1,231 mm / 15-3/4" x 28-1/2" x 48-1/2"
Weight		Approximately 130 kg / 285-1/2 lb
*1 Width including the primary (main) tray (with th		ie edge closed): 667 mm

Width including the primary (main) tray (with the edge closed). 667 min
Width including the primary (main) tray (with the edge pulled out): 784 mm

■ Saddle Stitcher SD-506

	_ 000	
Paper Size	Saddle Stitch/	SRA3, A3, B4, A4S, 12x18, 11x17, 8 1/2x14, 8 1/2x11S
(S: Short Edge Feed)	Trimming	Max. 324 mm × 463 mm, Min. 182 mm × 257 mm
	Folding	Centre-Fold: SAR3, A3, B4, A4S, B5S, 12x18, 11x17, 8 1/2x14, 8 1/2x11
	_	Max. 324 mm × 463 mm, Min. 182 mm × 257 mm
		Three Fold-in: A4S, 8 1/2x11S
	Straight (Sub Tray)	Max. 330 mm x 483 mm, Min. 100 mm x 148 mm
Paper Weight		Saddle Stitch / Trimming: 62 gsm to 244 gsm
		Centre-Fold: 62 gsm to 244 gsm
		Three Fold-in: 62 gsm to 91 gsm
		Straight (Sub Tray): 62 gsm to 300 gsm*1
Stitching Capacity		Max: 50 sheets (62 gsm to 81 gsm)
Trimming Capacity		50 sheets (80 gsm)
Fold Type		Centre-Fold, Three Fold-in
Folding Capacity		Centre-Fold: 30 sets
		Three Fold-in: 20 sets
Power Source		Supplied from the main unit
Max. Power Consumption		100VAC to 240VAC, 5VDC (supplied from the main body)
Dimensions [W] x [D] x [H]		When the stack output tray closed:
		1,170 mm x 775 mm x 1,020 mm / 46" x 30-1/2" x 40-1/4"
Weight		280 kg / 617-1/4 lb
*1 Looding paper waight 40	and or loss is not us	rranh

^{*1} Loading paper weight 49 gsm or less is not warranty.

■ Banner Kit MK-740

	•	
Applicable models	Feeding system	MB-506
	Output system	OT-502 TypeB/FS-612/FS531/FS-532 TypeB
Paper Size		Max.330×1,200mm Min. Width100mm
Paper Weights		128 to 256 gsm
Pape Type		Plain, Fine, Coated paper
Capacity		10 sheets (Plain paper)
		1 sheets (Coated paper)

■ Saddle-stitching Unit SD-513

Model			Saddle-stitching machine with edge-trimming and
Coddl	a atitahina Mada	Paper Size	multi-folding functions SRA3, A3, B4, A4 horizontal, B5 horizontal, wide paper,
Saddle-stitching Mode Paper Size		Paper Size	Irregular size paper (Maximum: 330 × 487 mm, Minimum*: 120 × 257 mn
		Paper weight	62 to 300gsm
		Maximum saddle-	62 to 64 gsm: 50 sheets, 65 to 81gsm: 35 sheets,
		stitched sheet count	82 to 91 gsm: 30 sheets, 92 to 130 gsm: 20 sheets,
		(For ordinary paper)	131 to 161 gsm: 15 sheets, 162 to 209 gsm: 10 sheets,
		(For ordinary paper)	
		Ctople position	210 to 244 gsm: 5 sheets, 245 to 300 gsm: 3 sheets Staple pitch (54 to 185.5 mm)
		Staple position Staple method	In-line clinch method
			A3. 11 x 17
	4-point	Compatible paper size	A3, 11 × 17
	stitching*2	Stitching position	Evenly distributed at a pitch of one-quarter of the main scanning
		Stitching position	direction length: However, the pitch is adjustable (±10 mm)
		Modes available for	Creaser (one crease at the centre), splitter, spine corner forming
		parallel use	Creaser (one crease at the centre), splitter, spine corner forming
O#-:	g mode	Paper Sizes	SRA3. A3. B4. A4 horizontal. B5 horizontal. wide paper.
Cuttin	g mode	Paper Sizes	Irregular size paper (Maximum: 330 x 487 mm,
			Minimum*: 120 × 257 mm)
		Paper weight	62 to 300 gsm
		Maximum number	50 sheets (80 gsm) × 2 = 100 sheets
		of sheets cut	
		Sheet-cutting amount	2 to 40 mm (Cutting of a finished booklet length of less than
			120 mm is not possible)
		Cutting point	Edge
		Cutting scrap	2,500 sheets (ordinary paper)*3 *With box-full detection function
		box capacity	
Multi-f	folding mode		
	Paper Sizes	Centre fold	SRA3, A3, B4, A4 horizontal, B5 horizontal, wide paper,
			Irregular size paper (Maximum: 331 × 488 mm,
			Minimum*1: 120 × 257 mm)
		Trifold	A4 horizontal
	Paper weight	Centre fold	62 to 300 gsm
		Trifold	62 to 91 gsm
		Crease + Trifold*4	80 to 216 gsm
	Overlapped	Centre fold	62 to 81 gsm: 5 sheets, 82 to 130 gsm: 3 sheets,
	sheet count		131 to 300 gsm: 2 sheets
		Trifold	62 to 81 gsm: 5 sheets, 82 to 91 gsm: 3 sheets
		Crease + Trifold	80 to 216 gsm: 1 sheets
Throu	gh pass/	Paper Sizes	SRA3, A3, B4, A4, B5. A5, index paper, Irregular size paper
Sub-tr	ray mode		(Maximum: 330 × 487 mm, Minimum: 100 × 140 mm), postcard
		Paper weight	62 to 350 gsm
Paper	storage capacity		
	Sub-tray*5	Single sheet	200 sheets (for 80 gsm sheets)
		Trifold, centre fold	20 sheets
	Booklet tray*5	Saddle-stitching mode	2 to 10 sheet saddle-stitched sheets: 30 sets,
Bookiet tray 5		11 to 25 saddle-stitched sheets: 18 sets,	
		26 to 50 saddle-stitched sheets: 10 sets	
		Multi-centre fold mode	
Trifold tray*s	Multi-trifold mode	1 folded sheet: 40 sets, 2 folded sheets: 20 sets,	
		3 folded sheets: 13 sets, 4 folded sheets: 10 sets,	
			5 folded sheets: 8 sets
	Mountable options		FD-504, CR-101, TU-503
Mount	Power supply		
			I Senarate nower supply: ADC100V(some nower is supplied from the main body
Power	r supply	notion	
Power Maxim	r supply num power consun		350W or less
Power Maxim	r supply num power consun Width × Depth × H		Separate power supply: ADC100V(some power is supplied from the main bod 350W or less 1,241 x 1,431 x 1,020 mm *The width does not include the booklet tray (238 ml Approximately 337 kg

■ Spine Corner Forming Unit FD-504

Compatible model			SD-513
Paper size			Conforms to SD-513 saddle-stitching mode specifications
	Paper weight		62 to 216 gsm
	Sheet processing capacity	Maximum	Conforms to SD-513 saddle-stitching mode specifications
		Minimum	5 sheets
	Cover		Short-grain paper only
	Power supply		Power supplied by SD-513
Maximum power consumption			60W or less
Size (Width × Depth × Height)			643 × 258 × 197 mm
Weight			13kg

■Creaser Unit CR-101

Compatible model	SD-513
Paper size	Crease + saddle-stitching mode, crease + multi-fold mode,
	crease + sub-tray mode, crease + through-pass mode:
	Conforms to SD-513 saddle-stitching/multi-centre fold mode specifications.
	Crease + multi-trifold mode: Conforms to SD-513 multi-trifold mode specifications.
	Crease + prefect-binding mode: Conforms to PB-503 cover specifications.
Paper weight	80 to 350 gsm
, ,	(The maximum paper weight conforms to crease-mode combination specifications.)
Crease count	1 to 4 creases (restrictions apply depending on the mode.)
Setting unit	0.1 mm
Minimum crease interval	1.0 mm
Power supply	Power supplied by SD-513
Maximum power consumption	25W or less
Size (Width x Depth x Height)	210 × 462.3 × 137 mm
Weight	6.8kg

■Trimmer Unit TU-503

Compatible model	00-010
Paper size	Slit + saddle-stitching mode, slit + multi-centre fold mode, slit + sub-tray mode,
	slit + straight mode, slit + shift mode:
	Conforms to SD-513 saddle-stitching mode specifications*:
	Slit + multi-trifold mode: Conforms to SD-513 multi-trifold mode specifications*2.
	Slit-perfect binding mode: Conforms to PB-503 cover specifications.
Paper weight	62 to 300 gsm (The maximum paper weight conforms to the after-
	processing machine specifications in each slit mode.)
Cut position	Top and bottom edge of booklet
Cut amount	62 to 300 gsm: 10 to 26 mm
	(Independent top and bottom settings: However, the difference in top and
	bottom cutting amounts is within 10 mm.)
Cutting scrap box capacity	(Width) 13 x (Height) 420mm, 2000 scraps of paper weight 80gsm
Power supply	Power supplied by SD-513
Maximum power consumption	50W or less
Size (Width × Depth × Height)	304 x 630 x 381 mm *From the manual rotary knob to the motor
Weight	18.7 kg, Scrap box: 1.4 kg
*1: The paper length in the main scanning direction afte	r slitting is 120mm or more. *2: Regulated according to the paper size before slitting.

■ Perfect Binder PB-503		
Paper Weight	Body	64 gsm to 105 gsm
	Cover	81 gsm to 209 gsm
Paper Size	Body	Max. 307 mm x 221 mm, Min. 139 mm x 210 mm
	Cover	Max. 307 mm × 472 mm, Min. 139 mm × 279 mm
• , • ,		Approximately 300 sheets max. (less than 30 mm thick) /
		Approximately 10 sheets min.
		Approximately 20 min.
Power Source		Supplied from the machine
Max. Power Consumption		100VAC 50/60Hz common
		5VDC (supplied from the main body)
Dimensions [W] x [D] x [H]		1,360 mm x 775 mm x 1,223 mm / 53-1/2" x 30-1/2" x 48-1/4"
Weight		Approximately 270 kg / 595-1/4 lb

^{*2:} The minimum number of required sheets is specified.

*3: For 10 saddle-stitched booklets of A3 or A4 with a paper weight of 80 gsm and cut amount of 2 mm.

*4: There may be some crease line and fold misalignment when paper of less than 105 gsm is used.

*5: With box-full detection function