

**bizhub** 950i

Black & White A3 multifunctional





Giving Shape to Ideas

# **CUSTOMER BENEFITS**



Intuitive operability Operate the bizhub like a smartphone or tablet with fully customised user interface

# **OPTIONS**



Application ecosystem Enhanced efficiency thanks to Konica Minolta's extensive applications portfolio



Reliability, high-speed scanning and printing, combined with powerful finishing functions



Services Efficient printer fleet management, including automatic consumables delivery, pro-active maintenance and remote setup




Sustainability Numerous eco features reduce energy consumption and costs



3 OTHERS Working table WT-506 Upright panel WT-519 10-Key pad KP-102 Security kit SC-509 Replacement SSD EM-908 Keyboard holder KH-102

OR



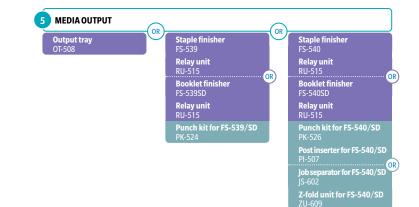



# **FINISHING FUNCTIONALITIES**



# DESCRIPTION

CONNECTIVITY FK-516 Fax board

UK-221 Wireless LAN

EK-610 USB I/F kit

EK-611 USB I/F kit

ID card reader MK-735 Mount kit

AU-102 Biometric authentication

ENHANCED FEATURES	
LK-105v4 OCR text recognition	Searchable PDF and PPTX
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document converter pack	Generates various file formats incl. DOCX, XLSX and PDF/A
LK-111 ThinPrint <sup>®</sup> client	Print data compression for reduced network impact
LK-114 Serverless pull printing	Secure and Follow Me printing solution requiring no server
	application
LK-115v2 Trusted Platform Module	Trusted Platform Module for protection of data encryption and
	decryption
	acciption
LK-116 Antivirus	Bitdefender® antivirus provides real time scanning of all
LK-116 Antivirus	

Super G3 fax, digital fax functioality

USB keyboard connection; Bluetooth

Installation kit for ID card reader

USB keyboard connection

Finger vein scanner Various ID card technologies

Wireless LAN and wireless LAN Access Point Mode

OTHERS		
WT-506 Working table	Authentication device placement	
WT-519 Upright panel	Working table for upright panel	
KP-102 10-Key pad	For use instead of touchscreen	
SC-509 Security kit	Copy guard function	
EM-908 Replacement SSD	1 TB SSD to increase storage space	
KH-102 Keyboard holder	To place USB keyboard	

### MEDIA INPUT

LU-303 Large capacity tray	3,000 sheets, A4, 52-256 g/m <sup>2</sup>
LU-205 Large capacity tray	2,500 sheets, A4-SRA3, 52-256 g/m <sup>2</sup>
BT-C1e Banner tray	Multipage banner feeding

### MEDIA OUTPUT

OT-508 Output tray	Output tray used instead of finisher
FS-539 Staple finisher	50 sheets stapling; 3,200 sheets max. output
FS-539SD Booklet finisher	50 sheets stapling; 20 sheets booklet finisher;
	2,200 sheets max. output
PK-524 Punch kit for FS-539/SD	2/4 hole punching; autoswitching
FS-540 Staple finisher	100 sheets stapling; 3,200 sheets max. output
FS-540SD Booklet finisher	100 sheets stapling; 20 sheets booklet finisher;
	2,700 sheets max. output
PK-526 Punch kit for FS-540/SD	2/4 hole punching; autoswitching
RU-515 Relay unit	For FS-539/SD or FS-540/SD installation
PI-507 Post inserter for FS-540/SD	Cover insertion; post finishing
JS-602 Job separator for FS-540/SD	Separation of fax output; etc.
ZU-609 Z-fold unit for FS-540/SD	Z-fold for A3 prints

# **TECHNICAL SPECIFICATIONS**

## SYSTEM SPECIFICATIONS

STSTEW SPECIFICATIONS	
System speed A4	Up to 95 ppm
System speed A3	Up to 48 ppm
Autoduplex speed A4	Up to 95 ppm
1st page out time A4	3.2 sec.
Warm-up time	Less than 55 sec.
Imaging technology	Laser
Toner technology	Simitri <sup>®</sup> V polymerised toner
Panel size/resolution	10.1" / 1024 x 600
System memory	8,192 MB (standard/max)
System hard drive	256 GB SSD (standard) / 1 TB SSD (optional)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP(S); Bonjour
Automatic document feeder	Up to 300 originals; A6-A3; 35-210 g/m <sup>2</sup> ; Dualscan ADF
ADF double feed detection	Standard
Printable paper size	A6-SRA3; customized paper sizes;
	banner paper max. 1,200 x 297 mm
Printable paper weight	52-300 g/m <sup>2</sup>
Paper input capacity	3,650 sheets / 6,650 sheets (standard/max)
Paper tray input (standard)	1x 500; A6-A3; custom sizes; 52-256 g/m <sup>2</sup>
	1x 500; A5-SRA3; custom sizes; 52-256 g/m <sup>2</sup>
	1x 1,500; A5-A4; 52-256 g/m <sup>2</sup>
	1x 1,000; A5-A4; 52-256 g/m <sup>2</sup>
Large capacity tray (optional)	1x 3,000; A4; 52-256 g/m <sup>2</sup>
	1x 2,500; A4-SRA3; custom sizes; 52-256 g/m <sup>2</sup>
Manual bypass	150 sheets; A6-SRA3; custom sizes, banner; 60-300 g/m <sup>2</sup>

## SYSTEM SPECIFICATIONS

Finishing modes (optional)	Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold;
	Letter-fold; Booklet; Post insertion; Z-fold
Automatic duplexing	A6-SRA3; 52-256 g/m <sup>2</sup>
Output capacity	Up to 200 sheets / up to 3,300 sheets (standard/max)
Stapling	Max. 100 sheets or 98 sheets + 2 cover sheets (up to 300 g/m <sup>2</sup> )
Stapling output capacity	Max. 200 sets
Letter fold	Max. 3 sheets
Letter fold capacity	Max. 50 sets; unlimited (without tray)
Booklet	Max. 20 sheets or 19 sheets + 1 cover sheet (up to $300 \text{ g/m}^2$ )
Booklet output capacity	Max. 35 booklets; unlimited (without tray)
Power consumption	220-240 V / 50/60 Hz; Less than 2.40 kW
System dimension (W x D x H)	670 x 820 x 1227 mm incl. ADF @
System weight	Approx. 202.0 kg (incl. ADF )

#### PRINTER SPECIFICATIONS

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Page description language	PCL 6 (XL3.0); PCL 5e/c; PostScript 3 (CPSI 3016); XPS
Operating systems	Windows 7 (32/64); Windows 8.1 (32/64); Windows 10 (32/64);
	Windows Server 2008 (32/64); Windows Server 2008 R2;
	Windows Server 2012; Windows Server 2012 R2;
	Windows Server 2016; Windows Server 2019;
	Macintosh OS X 10.13 or later; Linux
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	AirPrint (iOS); Mopria (Android);
	Konica Minolta Print Service (Android);
	Konica Minolta Mobile Print (iOS/Android)
	optional: WiFi Direct

## SCANNER SPECIFICATIONS

Scan speed	Up to 140/140 ipm in simplex (mono/colour)
	Up to 280/280 ipm in duplex (mono/colour)
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;
	Scan-to-DPWS; Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS; Compact XPS
	PPTX; PDF/A 1a and 1b
	optional: Searchable PDF; Searchable DOCX/PPTX/XLSX
Scan destinations	2,000 destinations + 100 groups; LDAP support

### COPIER SPECIFICATIONS

Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	Max. A3
Magnification	25-400% in 0.1% steps; Auto-zooming

#### FAX SPECIFCIATION

Fax standard	Super G3 (optional)
Fax transmission	Analogue; i-Fax; Colour i-Fax; IP-Fax
Fax resolution	Up to 600 x 600 dpi
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,000 single + 100 groups

## USER BOX SPECIFICATIONS

Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling

SYSTEM FEATURES	
Security	ISO15408 Common Criteria; IP filtering and port blocking;
	SSL3 and TLS1.0/1.1/1.2 network communication; IPsec support
	IEEE 802.1x support; User authentication; Authentication log;
	Secure print; Kerberos; Hard drive overwrite;
	Hard drive data encryption (AES 256); Confidential fax;
	Print user data encryption
	optional: Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard, Password Copy)
Accounting	Up to 1,000 user accounts; Active Directory support (user name +
	password + e-mail + smb folder); User function access definition;
	Authentication by mobile device (Android)
	optional: Biometric authentication (finger vein scanner);
	ID card authentication (ID card reader);
	Authentication by mobile device (iOS)
Software	Net Care Device Manager; Data Administrator; Box Operator;
	Web Connection; Print Status Notifier; Driver Packaging Utility;
	Log Management Utility

<sup>1</sup> Warm-up time may vary depending on the operating environment and usage

- <sup>2</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed
- All specifications refer to A4-size paper of 80 g/m<sup>2</sup> quality.
  The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations. - The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a
- particular page size (6% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.









